

Ultra Length Seamless Tube

Shinda (Tangshan) Creative Oil & Gas Equipment Co., Ltd.



Company Profile

华通石油作为上市公司华通线缆(605196.SH)的全资子公司，是一家集科研、生产、销售、服务为一体的智能油气解决方案提供商，通过全球战略布局，拥有完善的全球营销和服务网络，在哈萨克、坦桑尼亚、喀麦隆、哈萨克、韩国、安哥拉、巴拿马多国拥有生产基地，在美国、加拿大、新加坡、香港等地设立分子公司或仓库，业务范围涵盖全球六大洲的100多个国家和地区。

Huatong petroleum, as a wholly-owned subsidiary of public listed company Huatong group (605196.SH), is an intelligent oil and gas solution provider of R&D, Production, Sales and Service. Through global strategic layout, It has a global marketing and service network, with production bases in many countries including Kazakhstan, Tanzania, Cameroon, Kazakhstan, Korea, Angola and Panama, as well as warehouse or subsidiary in the United States, Singapore and Hong Kong, and our business scope covers more than 100 countries and regions in six continents.



API Spec 5ST

API Spec Q1


ISO9001

ISO14001

ISO45001



- ✔ SHINDA has established a strict quality control system in accordance with the requirements of API 5ST and Q1, and makes sure that all products are produced in strict accordance with the quality control system and meet the quality requirements.
- ✔ With the advanced manufacturing equipment, mature technology, professional team, and strict quality control system, SHINDA products will meet your needs.

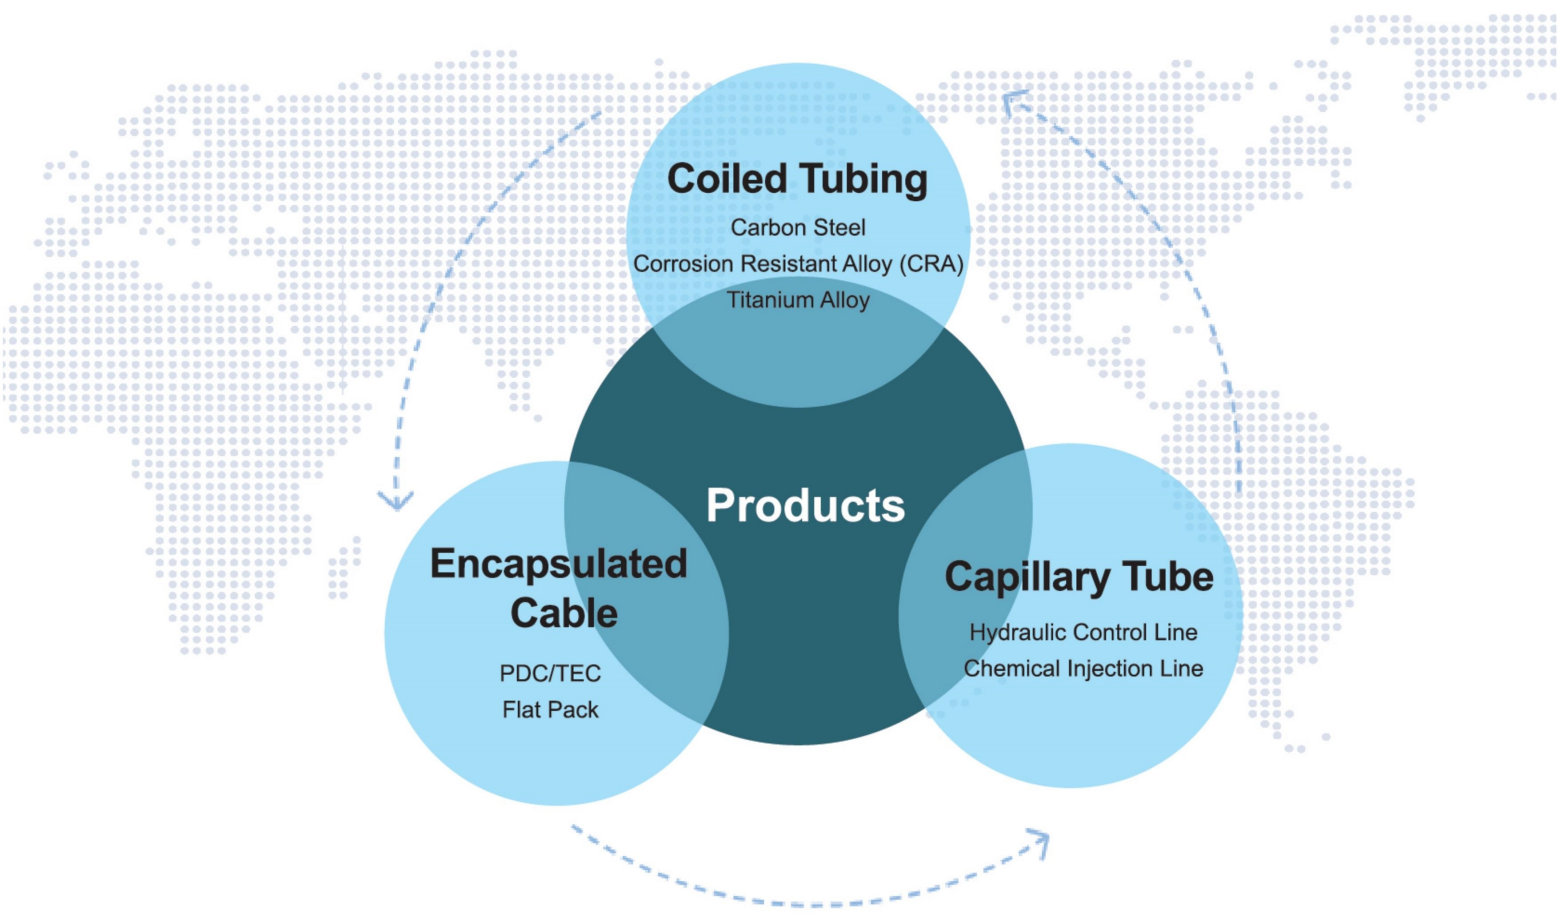

Coiled Tubing

Carbon Steel
Corrosion Resistant Alloy (CRA)
Titanium Alloy

Products


Encapsulated Cable

PDC/TEC
Flat Pack

Capillary Tube

Hydraulic Control Line
Chemical Injection Line

技术参数 DATASHEET

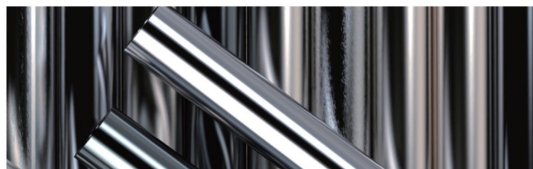

材质 Materials		ST316L-40	ST2205-80	ST2507-90	ST825-40	ST625-40
化学 成分	Cmax	0.030	0.030	0.030	0.05	0.10
	Mnmax	2.00	2.00	1.20	1	0.50
	Pmax	0.045	0.030	0.035	...	0.015
	Smax	0.030	0.020	0.020	0.03	0.015
	Simax	0.75	1.00	0.80	0.5	0.5
	Cr	16.0-18.0	22.0-23.0	24.0-26.0	19.5-23.5	20.0-23.0
Chemical Compo- sition	Nimin	10.0-14.0	4.5-6.5	6.0-8.0	38.0-46.0	58.0
	Mo	2.00-3.00	3.0-3.5	3.0-5.0	2.5-3.5	8.0-10.0
	Cu					
	Femax					
屈服强度 Yield Strength (min), psig		40,000	80,000	90,000	40,000	40,000
抗拉强度 Tensile Strength (min), psig		70,000	95,000	116,000	85,000	100,000
硬度 Hardness HRC		200HV	30	32	/	/

ST316L-40 0.125 in to 0.625 in

外径 OD	壁厚 Wall Thickness		单位长度 质量 Mass Per Unit Length	名义内径 Nominal Inside Diameter	管体载荷 Tube Body Load		最小静水压 试验压力 Min. Hydro Test Pressure	最小内屈服 压力 Min. Internal Yield Pressure	挤毁强度 Collapse Pressure
	规定 Specified	最小 Min.			最小屈服载荷 Min. Yield Strength	最小抗拉载荷 Min. Tensile Strength			
	t	tmin	lbs/ft	in.			lbs	lbs	psig
0.125	0.028	0.025	0.03	0.069	300	600	14,500	16,100	12,800
	0.035	0.032	0.04	0.055	400	700	17,500	20,200	15,100
0.250	0.035	0.032	0.09	0.180	900	1,700	9,100	10,100	8,800
	0.049	0.044	0.11	0.152	1,200	2,200	12,700	14,100	11,700
	0.065	0.059	0.14	0.120	1,500	2,600	16,800	18,700	14,300
0.375	0.035	0.032	0.13	0.305	1,500	2,600	6,000	6,700	6,200
	0.049	0.044	0.18	0.277	2,000	3,500	8,500	9,400	8,300
	0.065	0.059	0.22	0.245	2,500	4,400	11,200	12,500	10,500
	0.080	0.072	0.26	0.215	3,000	5,200	13,800	15,400	12,000
0.500	0.049	0.044	0.25	0.402	2,800	4,900	6,400	7,100	6,500
	0.065	0.059	0.31	0.370	3,600	6,200	8,400	9,400	8,300
	0.080	0.072	0.37	0.340	4,200	7,400	10,400	11,500	9,900
0.625	0.049	0.044	0.31	0.527	3,500	6,200	5,100	5,600	5,300
	0.065	0.059	0.40	0.495	4,600	8,000	6,700	7,500	6,800

技术参数 DATASHEET



外径 OD	壁厚 Wall Thickness		单位长度 质量	名义内径	管体载荷 Tube Body Load		最小静水压 试验压力	最小内屈服 压力	挤毁强度
in.	规定 Specified	最小 Min.	Mass Per Unit Length	Nominal Inside Diameter	最小屈服载荷	最小抗拉载荷	Min. Hydro Test Pressure	Min. Internal Yield Pressure	Collapse Pressure
	t	tmin	Wpe	ID	Min. Yield Strength	Min. Tensile Strength			
	in.	in.	lbs/ft	in.	lbs	lbs			
0.250	0.035	0.032	0.08	0.180	1,900	2,200	17,500	20,200	17,600
	0.049	0.044	0.11	0.152	2,500	2,900	17,500	28,200	23,300
	0.065	0.059	0.13	0.120	3,000	3,600	17,500	37,400	28,700
0.375	0.035	0.032	0.13	0.305	3,000	3,600	12,100	13,400	12,300
	0.049	0.044	0.17	0.277	4,000	4,800	16,900	18,800	16,700
	0.065	0.059	0.22	0.245	5,100	6,000	17,500	25,000	21,100
	0.080	0.072	0.26	0.215	5,900	7,000	17,500	30,700	24,800
0.500	0.049	0.044	0.24	0.402	5,600	6,600	12,700	14,100	12,900
	0.065	0.059	0.31	0.370	7,100	8,400	16,800	18,700	16,500
	0.080	0.072	0.36	0.340	8,400	10,000	17,500	23,000	19,700
0.625	0.049	0.044	0.30	0.527	7,100	8,400	10,200	11,300	10,100
	0.065	0.059	0.39	0.495	9,100	10,900	13,500	15,000	13,600

ST2507-80 0.25 in to 0.625 in

外径 OD	壁厚 Wall Thickness		单位长度 质量	名义内径	管体载荷 Tube Body Load		最小静水压 试验压力	最小内屈服 压力	挤毁强度
in.	规定 Specified	最小 Min.	Mass Per Unit Length	Nominal Inside Diameter	最小屈服载荷	最小抗拉载荷	Min. Hydro Test Pressure	Min. Internal Yield Pressure	Collapse Pressure
	t	tmin	Wpe	ID	Min. Yield Strength	Min. Tensile Strength			
	in.	in.	lbs/ft	in.	lbs	lbs			
0.250	0.035	0.032	0.09	0.180	2,100	2,700	17,500	22,700	19,800
	0.049	0.044	0.11	0.152	2,800	3,600	17,500	31,800	26,200
	0.065	0.059	0.14	0.120	3,400	4,400	17,500	42,100	32,200
0.375	0.035	0.032	0.14	0.305	3,400	4,300	13,600	15,100	13,800
	0.049	0.044	0.18	0.277	4,500	5,800	17,500	21,200	18,700
	0.065	0.059	0.23	0.245	5,700	7,300	17,500	28,100	23,700
	0.080	0.072	0.26	0.215	6,700	8,600	17,500	34,600	27,900
0.500	0.049	0.044	0.25	0.402	6,200	8,100	14,300	15,900	14,500
	0.065	0.059	0.31	0.370	8,000	10,300	17,500	21,100	18,600
	0.080	0.072	0.37	0.340	9,500	12,200	17,500	25,900	22,100
0.625	0.049	0.044	0.31	0.527	8,000	10,300	11,400	12,700	11,100
	0.065	0.059	0.40	0.495	10,300	13,300	15,200	16,800	15,200

技术参数

DATASHEET



外径 OD	壁厚 Wall Thickness		单位长度 质量	名义内径	管体载荷 Tube Body Load		最小静水压 试验压力	最小内屈服 压力	挤毁强度
in.	规定 Specified	最小 Min.	Mass Per Unit Length	Nominal Inside Diameter	最小屈服载荷	最小抗拉载荷	Min. Hydro Test Pressure	Min. Internal Yield Pressure	Collapse Pressure
	t	tmin	Wpe	ID	Min. Yield Strength	Min. Tensile Strength			
	in.	in.	lbs/ft	in.	lbs	lbs			
0.125	0.028	0.025	0.04	0.069	300	700	14,500	16,100	12,800
	0.035	0.032	0.04	0.055	400	800	17,500	20,200	15,100
0.250	0.035	0.032	0.09	0.180	900	2,000	9,100	10,100	8,800
	0.049	0.044	0.11	0.152	1,200	2,600	12,700	14,100	11,700
	0.065	0.059	0.14	0.120	1,500	3,200	16,800	18,700	14,300
0.375	0.035	0.032	0.14	0.305	1,500	3,200	6,000	6,700	6,200
	0.049	0.044	0.18	0.277	2,000	4,300	8,500	9,400	8,300
	0.065	0.059	0.23	0.245	2,500	5,400	11,200	12,500	10,500
	0.080	0.072	0.27	0.215	3,000	6,300	13,800	15,400	12,400
0.500	0.049	0.044	0.25	0.402	2,800	5,900	6,400	7,100	6,500
	0.065	0.059	0.32	0.370	3,600	7,600	8,400	9,400	8,300
	0.080	0.072	0.38	0.340	4,200	9,000	10,400	11,500	9,900
0.625	0.049	0.044	0.32	0.527	3,500	7,500	5,100	5,600	5,300
	0.065	0.059	0.41	0.495	4,600	9,700	6,700	7,500	6,800

ST625-40 0.125 in to 0.625 in

外径 OD	壁厚 Wall Thickness		单位长度 质量	名义内径	管体载荷 Tube Body Load		最小静水压 试验压力	最小内屈服 压力	挤毁强度
in.	规定 Specified	最小 Min.	Mass Per Unit Length	Nominal Inside Diameter	最小屈服载荷	最小抗拉载荷	Min. Hydro Test Pressure	Min. Internal Yield Pressure	Collapse Pressure
	t	tmin	Wpe	ID	Min. Yield Strength	Min. Tensile Strength			
	in.	in.	lbs/ft	in.	lbs	lbs			
0.125	0.028	0.025	0.04	0.069	300	900	14,500	16,100	12,800
	0.035	0.032	0.04	0.055	400	1,000	17,500	20,200	15,100
0.250	0.035	0.032	0.09	0.180	900	2,400	9,100	10,100	8,800
	0.049	0.044	0.12	0.152	1,200	3,100	12,700	14,100	11,700
	0.065	0.059	0.14	0.120	1,500	3,800	16,800	18,700	14,300
0.375	0.035	0.032	0.14	0.305	1,500	3,700	6,000	6,700	6,200
	0.049	0.044	0.19	0.277	2,000	5,000	8,500	9,400	8,300
	0.065	0.059	0.24	0.245	2,500	6,300	11,200	12,500	10,500
	0.080	0.072	0.28	0.215	3,000	7,400	13,800	15,400	12,400
0.500	0.049	0.044	0.26	0.402	2,800	6,900	6,400	7,100	6,500
	0.065	0.059	0.33	0.370	3,600	8,900	8,400	9,400	8,300
	0.080	0.072	0.39	0.340	4,200	10,600	10,400	11,500	9,900
0.625	0.049	0.044	0.33	0.527	3,500	8,900	5,100	5,600	5,300
	0.065	0.059	0.42	0.495	4,600	11,400	6,700	7,500	6,800



全球营销和服务网络 Global Marketing and Service Network



仓库 Warehouses



阿联酋、阿曼、美国、加拿大
UAE, Oman, USA, Canada.

子公司 Subsidiaries



美国、巴林、新加坡、香港
USA, Bahrain, Singapore, Hong Kong.

生产工厂 Factories



中国、坦桑尼亚、喀麦隆、哈萨克、韩国
China, Tanzania, Cameroon, Kazakhstan, South Korea.

地址：河北省唐山市丰南区经济开发区华通大街111号
 邮箱：shindasales@huatongcables.com
 电话：+86-315-5098988 (国内业务)
 +86-315-5092270 (国际业务)
 网址：www.shindatubing.com

Add: No. 111, Huatong Street, Fengnan District,
 Tangshan, Hebei Province, 063300, China
 Email: shindasales@huatongcables.com
 Tel: +86-315-5098988 (Domestic Business);
 +86-315-5092270 (International Business)
 Website: www.shindatubing.com